

TRK210

DATASHEET

NB-IoT / LTE-M / EGPRS Low Power Tracker

Rev. TRK210 V1.1

Date: 2018-08-17

For any assistance please contact:

Email: info@accent-systems.com

For more information or technical support please visit:

<https://accent-systems.com/support/>

COPYRIGHT

THE INFORMATION CONTAINED HERE IS PROPRIETARY TECHNICAL INFORMATION OF ACCENT SYSTEMS, REPRODUCTION, DISSEMINATION AND EDITING OF THIS DOCUMENT AS WELL AS UTILIZATION OF THE CONTENT ARE FORBIDDEN WITHOUT PERMISSION. OFFENDERS WILL BE HELD LIABLE FOR PAYMENT OF DAMAGES. ALL RIGHTS ARE RESERVED IN THE EVENT OF A PATENT GRANT OR REGISTRATION OF A UTILITY MODEL OR DESIGN.

THE INFORMATION IN THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE.

HISTORY

Revision	Date	Description
TRK210_V1	2018-08-09	Initial
TRK210_V1.1	2018-08-17	Changed battery specs due an error in V1



TRK210

FEATURES

- NB-IOT / LTE-M (CAT-M1) / EGPRS
- Multiband
- GPS receiver for precise outdoor location
- Wi-Fi Location
- Cell ID location
- BLE indoor micro-location
- SOS Button
- Battery status LED
- Internal temperature sensor
- Optional high precision external temperature sensor
- Shock detection
- Movement detection
- Internal buzzer
- Micro Sim (3FF)
- Low power management for ultra-long battery life applications
- Bluetooth Low Energy interface
- Compact size
- Waterproof
- Shockproof
- Easy to install with 4 bolt fixing or sticker
- Customisation available under request
- BLE firmware update

APPLICATIONS

- Logistics
- Cold chain monitoring
- Asset tracking
- Fleet management
- Agriculture
- Industry
- Smart buildings







1. SPECIFICATIONS

Dimensions	73 mm x 50 mm x 29.4 mm
Weight	103 gram
LPWAN technologies	NB-IoT / LTE-M (CAT-M1) / EGPRS
NB-IoT bands	B1/B2/B3/B4/B5/B8/B12/B13/B18/ B19/B20/B26/B28
LTE-M bands	B1/B2/B3/B4/B5/B8/B12/B13/B18/ B19/B20/B26/B28/B39
EGPRS bands	GSM-900 / GSM-1800 GSM-850 / GSM-1900
SIM card holder	Micro Sim (3FF)
Location methods	GPS / Wi-Fi / Cell ID / Bluetooth Low Energy Beacons
GPS antenna pattern	Omnidirectional
Secondary wireless interface	Bluetooth Low Energy
Battery	3 x SAFT LS14500 non rechargeable batteries
Battery capacity	7800 mAh
Low battery indication	Reported to cloud platform LED sequence
Sensors	Accelerometer, temperature
Human interfaces	Push Button Buzzer RGB Led
Firmware update	Over Bluetooth update
Operating temperature	-35°C to 75°C
Case material	ABS
Button material	TPU
Fixing methods	4 M3 bolts Sticker

2. ORDER INFORMATION

TRK210	Global version (works in all countries)
---------------	---

3. MECHANICAL DRAWINGS

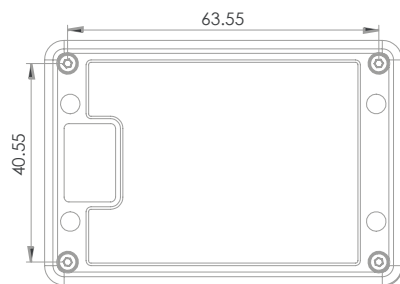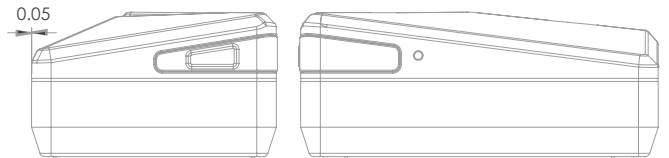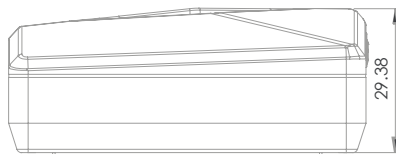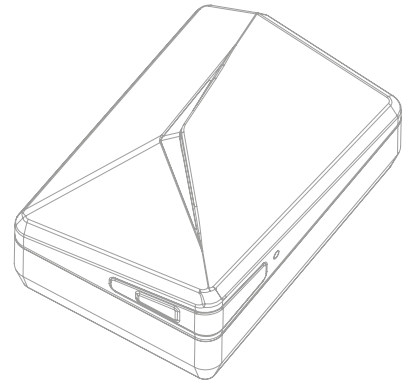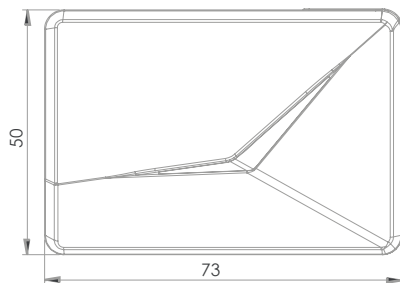

Mechanical drawings TRK210, units in mm.

4. LOCATION METHODS OVERVIEW

TRK210 have 4 methods for establish the position of the device:

- **GPS:** for outdoor location with high accuracy.
- **Wi-Fi:** for urban or indoor areas, less accuracy than GPS but more efficient in terms of energy consumption. The position is calculated in Accent Systems Inmolecular cloud platform.
- **Cell ID based location:** coarse location implicit in every data upload to cloud by the device. The position is calculated in Accent Systems Inmolecular cloud platform.
- **Bluetooth Low Energy:** optional location method using BLE beacons for indoor micro-location. The position is calculated in Accent Systems Inmolecular cloud platform.

5. ENERGY CONSUMPTION

TRK210 is designed to provide very high efficiency in terms of power consumption and be able to be active in long periods.

6. BASIC FUNCTIONS

The device is connected to Inmolecular cloud platform using NB-IOT and there are 4 different modes:

- **Interval:** period of time to send data defined by the user, could be defined two different intervals in function if the device is moving or not. Every time that TRK210 connects to the Inmolecular platform sends information of coarse location (Cell ID), fine location if is available (GPS/Wi-Fi), ambient temperature and battery level.
- **SOS button:** every time that the SOS button is pressed TRK210 connects to the cloud server and sends a SOS alarm with the current position.
- **Temperature alarm:** if the temperature is out of the limits set by the user the device sends temperature alarm to Inmolecular platform. This alarm could be disabled by the user.
- **Shock detection alarm:** every time that a shock above the threshold defined by the user, the devices send the event to Inmolecular platform. This alarm could be disabled by the user.



Terra Alta, 1-3 (Pol. Ind. Can Carner)
08211 Castellar del Vallès
Barcelona - Spain
Telf: (+34) 93.512.51.38

www.accent-systems.com